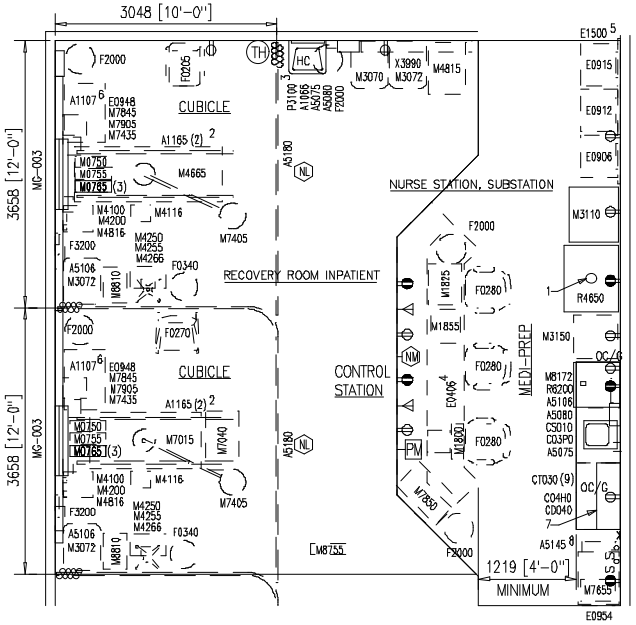

NOTES

1. PROVIDE M8755, LOW PRESSURE, LOW VOLUME SURGICAL ASPIRATOR, IN THE VICINITY OF THE RECOVERY ROOM.

KEY NOTES

1. PROVIDE FLOOR DRAIN WITH FUNNEL OR FLOOR SINK.
2. PROVIDE A1165, IV TRACKS, FOR NAVY PROJECTS ONLY.
3. PROVIDE AT LEAST ONE HANDWASHING FACILITY OR ONE FOR EVERY THIRD RECOVERY MODULE. P3200, ELECTRONIC LAVATORY, MAY BE USED INSTEAD OF P3100, LAVATORY. FOR THE P3200 PROVIDE EITHER BATTERY POWER OR HARD WIRED CONNECTION.
4. SIZE AND CONFIGURATION OF E0406, NURSE STATION, MAY VARY.
5. LENGTH OF E1500, WALL MOUNTED RAIL, TO BE DETERMINED BY MANUFACTURER/INSTALLER.
6. SEE ELEVATION OF A1107, UTILITY RAIL SYSTEM, FOR UTILITIES.
7. ALL CABINETS SHALL BE LOCKING.
8. MOUNT A5145, HOOK, AT 1372 [4'-6"] AFF.

RECOVERY ROOM, INPATIENT & NURSE STATION, SUBSTATION (RRSS1/NSTA3)

SURGERY (INPATIENT & AMBULATORY)

FLOOR/EQUIPMENT PLAN 57.74 NSM (621 NSF)

DATE: 01/28/2002

0 1000 2000

1:50 SCALE (MILLIMETERS)