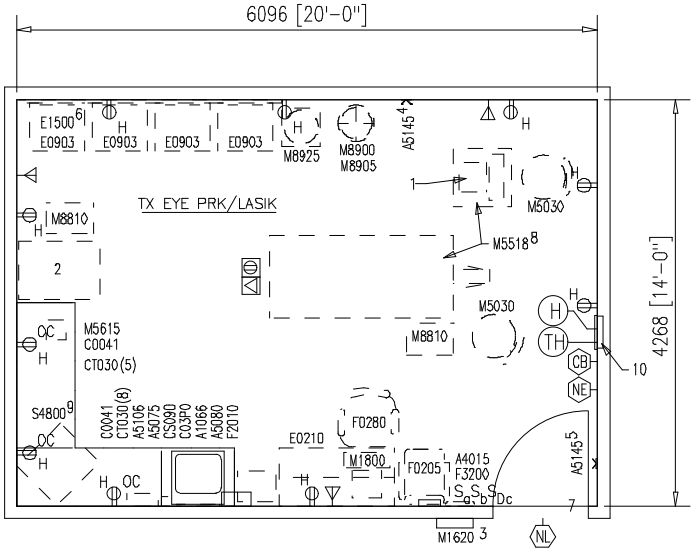


KEY NOTES

1. A LOCAL OR REMOTE SECOND MONITOR IS OPTIONAL.
2. ROOM AIR PURIFIER
3. COORDINATE LOCATION OF M1620, PATIENT CHART HOLDER, AND ROOM SIGNAGE.
4. MOUNT A5145, HOOK, AT 1372 [4'-6"] AFF.
5. MOUNT A5145, HOOK, AT 1219 [4'-0"] AFF. PROVIDE 2-A5145'S FOR NAVY PROJECTS ONLY. MOUNT 1-A5145 AT 1219 [4'-0"] AFF AND 1-A5145 AT 1524 [5'-0"] AFF.
6. LENGTH OF E1500, WALL MOUNTED RAIL, TO BE DETERMINED BY MANUFACTURER/INSTALLER.
7. PROVIDE CIPHER LOCK FOR DOOR.
8. A RECLINING CHAIR MAY BE USED INSTEAD OF A BED.
9. S4800, STERILIZER, IS FOR NAVY PROJECTS ONLY.
10. VISUAL TEMPERATURE AND HUMIDITY GAUGES. SENSORS AND VISUAL GAUGES MAY BE COMBINED IN A SINGLE UNIT. MOUNT TOP OF GAUGES AT 1372 [4'-6"] AFF.

# TX EYE PRK/LASIK (TREY3)

OPHTHALMOLOGY/OPTOMETRY

FLOOR/EQUIPMENT PLAN 26.02 NSM (280 NSF)

DATE: 01/28/2002

0 1000 2000

1:50 SCALE (MILLIMETERS)