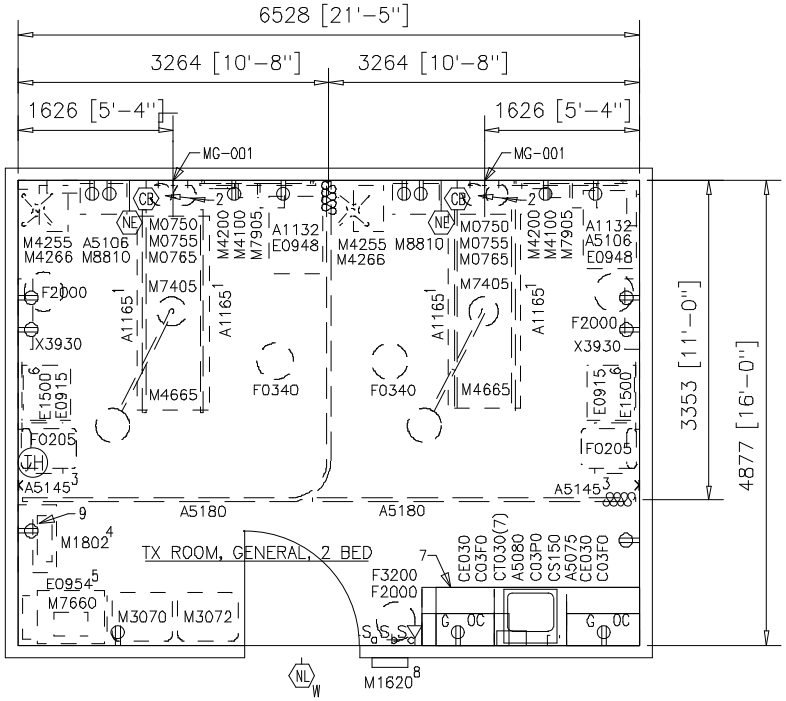

NOTES
1. PROVIDE HOSPITAL GRADE RECEPTACLES AT PATIENT STRETCHER ON EMERGENCY POWER WHEN INSTALLED IN A HOSPITAL.

KEY NOTES
1. PROVIDE A1165, IV TRACKS, FOR NAVY PROJECTS ONLY.
2. PROVIDE BOTTLED GAS IF BUILDING PIPED MCA AND OX ARE NOT AVAILABLE.
3. MOUNT A5145, HOOK, AT 1372 [4'-6"] AFF. PROVIDE 2-A5145'S FOR NAVY PROJECTS ONLY. MOUNT 1-A5145 AT 1372 [4'-6"] AFF AND 1-A5145 AT 1524 [5'-0"] AFF.
4. COORDINATE LOCATION OF ELECTRICAL OUTLETS WITH M1802, WALL MOUNTED, FOLD DOWN COMPUTER.
5. ONLY 1-E0954, EMERGENCY CART, AND M7660, DEFIBRILLATOR, IS REQUIRED PER OUTPATIENT CLINIC.
6. LENGTH OF E1500, WALL MOUNTED RAIL, TO BE DETERMINED BY MANUFACTURER/INSTALLER.
7. ALL CABINETS SHALL BE LOCKING.
8. COORDINATE LOCATION OF M1620, PATIENT CHART HOLDER, AND ROOM SIGNAGE.

TREATMENT ROOM, GENERAL, 2 BED (TRGM2)

PRIMARY CARE/FAMILY PRACTICE

FLOOR/EQUIPMENT PLAN 31.84 NSM (343 NSF)

DATE: 07/12/2001

0 1000 2000

1:50 SCALE (MILLIMETERS)