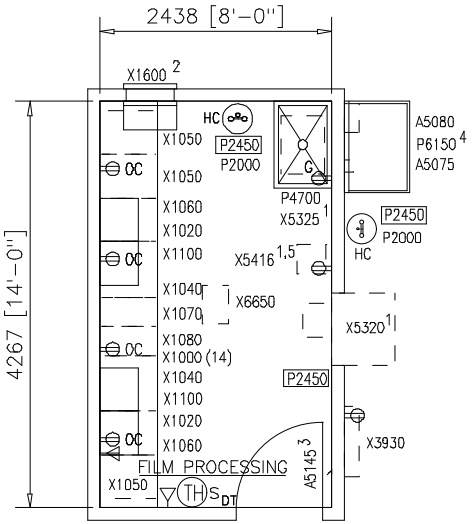

NOTES
1. PROVIDE AN "IN USE" LIGHT IF REQUIRED.

KEY NOTES
1. QUANTITY OF X5320, FILM PROCESSOR, X5325, CHEMICAL MIXER, AND X5416, SILVER RECOVERY UNIT, MAY VARY ACCORDING TO WORK LOAD.
2. PROVIDE A X1600, TRANSFER CABINET, ONLY WHEN THE PROCESSING ROOM IS ADJACENT TO A RADIOLOGY ROOM. COORDINATE THE LOCATION OF THE X1600 WITH ITS POSITION IN THE RADIOLOGY ROOM.
3. MOUNT A5145, HOOK, AT 1372 [4'-6"] AFF. PROVIDE 2-A5145'S FOR NAVY PROJECTS ONLY. MOUNT 1-A5145 AT 1372 [4'-6"] AFF AND 1-A5145 AT 1524 [5'-0"] AFF.
4. P6150, SINK, IS REQUIRED ONLY FOR THRU WALL FILM PROCESSOR SYSTEMS, X5320. THIS IS TO BE LOCATED OUTSIDE THE PROCESSING ROOM AND WITHIN PROXIMITY TO THE X5320.
5. X5416, SILVER RECOVERY UNIT, IS PROVIDED BY THE DEFENSE REUTILIZATION SERVICE AND MARKETING OFFICE.

FILM PROCESSING (XFP01)

RADIOLOGY/NUCLEAR MEDICINE

FLOOR/EQUIPMENT PLAN 10.40 NSM (112 NSF)

DATE: 07/12/2001

0 1000 2000

1:50 SCALE (MILLIMETERS)